

# BBS1500i-40

## Blackbody Calibration Source

Large Aperture, Radiometric Temperature Source for Calibration of Pyrometers



Medium-High Temperature, High Emissivity / Uniformity Blackbody for Precision Calibration of IR Thermometers, Thermal Imaging Detectors and Cameras, Heat Flux Meters, Spectrophotometers and Radiometers up to 1500°C.

### FEATURES

- Wide/adjustable temperature range from 50 to 1500°C (122 to 2732°F) with 40 mm (1.57") aperture
- For precise calibration of pyrometers with spot sizes up to 25 mm
- Set point in 1° increments with a temperature stability of better than 0.5° over 30 min
- Fast heat up time - 1500°C in 50 minutes
- Cylindrical cavity for uniform temperature radiation
- Set point and actual temperature values are displayed simultaneously
- Auxiliary connections:
  - Interface for communication via PC with software
  - Pyrometer analog output for analog calibration
- Provides 24 V DC power to operate the Metis, Sirius or Diadem pyrometers
- Cooling fan for safe enclosure operating temperature
- Traceability to International Temperature Standard ITS 90 when using a Diadem transfer standard pyrometer

## Calibration System BBS1500i-40

The BBS1500i-40 calibration system combines the features of a precisely controlled temperature source with the calibration and adjustment task. It communicates with connected pyrometers and transmits and receives measurement data for manual or fully automatic tasks:

- Pyrometric readjustment of the BBS1500i-40
- Create calibration certificates
- Readjustment of pyrometers according to detected deviations via separately available software *SensorCal3*



## Features

### Large, stable temperature range:

- from 50 to 1500°C
- for measuring fields up to 25 mm

### Fast ready for operation:


- only 50 minutes to max temperature

### Connections:

- PC connection (serial interface)
- Pyrometer connection
- Analog output of the pyrometer


### Temperature controller / display:

- Own controller for temperature specification and communication with pyrometers

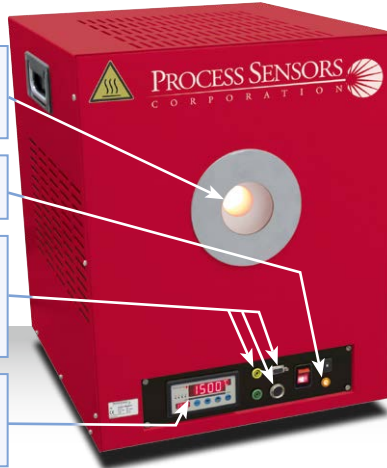

### Calibration and adjustment software included:

- for the pyrometric readjustment of the BBS1500i-40
- to create calibration certificates

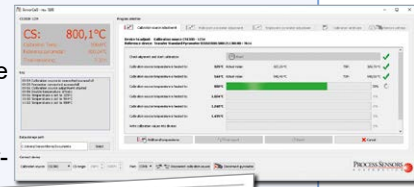

## Technical Data

Temperature range	50°C to 1500°C (122 to 2732°F)
Temperature uniformity	Spot size Ø 10 mm: ±0.5°C Spot size Ø 25 mm: ±1.5°C
Stability	< ±0.5K over 30 min
Heating-up time	35 min. to reach 1000°C, +20 min to reach 1500°C
Aperture	Ø 40 mm (1.57")
Cavity	Silicon carbide, depth 225 mm
Emissivity	0.993 ±0.004 at wavelength ranges between 0.5 and 3.5 µm
Heating elements	6 x Silicon carbide
Method of control	PID controller with thermocouple type S
Heating indication	Indicator lamp

Display	LED display, red (actual value: 7 segment, H=13 mm / setpoint: dot matrix H=5 mm)
Display resolution	1°C on the device; 0.1°C via software
Display accuracy	±0.2% +1°C
Serial interface	RS485
Power supply	220–240 V AC, 50-60 Hz, max. 3 kVA (connector: blue CEE connector)
Housing	Steel, powder coated
Device fuse	Automatic fuse 16 A slow
Dimensions	563 x 459 x 512 mm (H x W x D)
Weight	40 kg (88 lb.)
Ambient temperature	10 to 30°C (50 to 86°F) Storage temp. -20 to 50°C (-4 to 122°F)
Relative humidity	No condensing conditions
CE label	According to EU directives for electromagnetic immunity

## Reference Numbers

BBS1500i-40	Calibration source BBS1500i-40 (scope of delivery: incl. PC connection cable (interface converter RS485⇔USB), pyrometer connection cable (12-pin, 2.5 m), calibration software <i>SensorCal3</i> for calibration and adjustment of the BBS1500i-40, evaluation and analysis software <i>SensorTools</i> )
SW3600	<i>SensorCal3</i> software, activated for calibration and adjustment of Process Sensors pyrometers
Diadem DI16	Transfer Standard Pyrometer for calibration verification and pyrometric calibration of the BBS1500i-40. Temperature range 50–1400°C, spectral range 1.45–1.8 µm, optics OD09-A0 with a: 600 mm, M: 1.6 mm (to select with laser targeting light or through lens view finder as sighting system)
AL12-02	Separate 12-pin pyrometer connection cable (2.5 m)
WB23-2-1-05 / -1-1-05	Wiring Box: additional pyrometer supply and PC connection kit, consisting of a connection box with 24 V power supply, 5 m pyrometer connection cable (12-pin connector) and a RS485 interface converter / RS232 interface converter)

Process Sensors IR reserves the right to make changes in scope of technical progress or further developments.

Datasheet\_BBS1500i\_CalibrationSource (07/24/24)

PROCESS SENSORS CORPORATION

IR Temperature Sales: 787 Susquehanna Avenue, Franklin Lakes, NJ USA • Tel: 774-399-0461

Corporate Headquarters: 8 Technology Drive, Westborough, MA 01581 USA • Tel: 744-399-0500

www.ProcessSensorsIR.com • irtemp@kpmanalytics.com

A KPM Analytics Company