

tlogSMART+ PDF USB Temperature + RH Logger with Intelligent LCD display (-30 to +70°C / 0 to 98%RH)

TL-784



Range: -30 to +70°C / 0 to 98% RH



Direct USB A-Type



Automatic PDF Report



Huge Memory 16,000 Readings



EN 12830 Compliant



Robust Case Transit Safe



ISO 9001:2015 Certified Company



CE Compliant

- ▶ Highly Reliable & Accurate PDF Temperature + RH USB Logger
- ▶ Large Memory Capacity 32K (16000 readings per channel)
- ▶ Trigger Start | Delay Start | Trigger Stop option
- ▶ Pre-programmed Logging Interval Enable Quick Start
- ▶ Pre-programmed Alarm Limits
- ▶ Sleek, Robust & Tamper-Proof Case
- ▶ Monitor in-transit Temperature up to One Year – depending on Logging Interval
- ▶ Intelligent LDC display to view current readings, min/max/avg. value & alarm status
- ▶ Direct USB 2.0, A-Type Plug Integrated for Independent Interface
- ▶ Automatically Generate Secured PDF Report for Easy End of Trip Download
- ▶ No Software | No Cable | No Reader are required for data retrieval
- ▶ Available with Calibration Certificate – National | International Traceable

tlogSMART+ PDF are most accurate; intelligent & economical loggers specially designed to retrieve recorded in-transit temperature + relative humidity readings without any need of proprietary software, PC interface cable or reader. Unit can easily slide into your existing packaging for monitoring and recording in-transit temperature + relative humidity conditions of pharmaceuticals, vaccines, biological products, chemicals, dairy products, agriculture, horticulture and many other sensitive shipments

Sleek design with robust casing has an advantage of placing it easily with your products for monitoring actual temperature + relative humidity condition. Factory programming as per user requirements enable quick start anywhere without using PC/Laptop. Multi-function LCD display indicates Current Reading, Minimum | Maximum | Average values, Logger & Alarm status.


TL-784 can monitor and record in-transit temperature + relative humidity condition of shipment for up to One Year with its huge internal memory capacity of 32000 readings & long battery life. Integrated A-type USB port for an independent PC interface at the receiver end. No need of any additional hardware reader or cable to connect logger & software to download recorded readings from it. Unit will automatically create a tamper-proof secured & unalterable Adobe PDF report of all recorded in-transit readings.

Specifications:

- Type: PDF Temperature + Relative Humidity USB Logger
- Range: -30 to +70°C (-22 to +158°F) | 0 to 98%RH
- Accuracy: better than $\pm 0.5^\circ\text{C}$ | $\pm 3\%$ RH
- Resolution: 0.1°C
- Memory Type: Non-volatile
- Memory Capacity: 32,000 readings (16,000 readings per channel)
- Logging Interval: 1 minute to 18 hours (pre programmed as per User requirements)
- Delay Start: 1 minute to 10 days (pre programmed as per User requirements)
- Alarm: 2 programmable High & Low Alarm set points (pre programmed as per User requirements)
- Indication: Multi-function LCD display to view Current Reading; Minimum | Maximum | Average value
Status: START | STOP | RECORDING | OK – for No Alarm condition
- Push Buttons: Two secured push button to trigger START & STOP logger
- Case: Robust | Tamper-proof | Polycarbonate / ABS food grade case (optional with IP67 protected waterproof cover)
- Dimensions: L 80mm x H 43mm x W 10mm (approx)
- Weight: 30g (approx)
- Battery Type: 3.0V Lithium Cell
- Battery Life: 12 months operating life
- Shelf Life: 24 months dependant on the storage conditions (optimal storage conditions is +15 to +24°C / 45 to 75%RH)
- PC Interface: Direct USB 2.0, A-Type plug (integrated - for independent interface)
- PDF Report: Automatically generate Adobe PDF report including Graph, Table & Summary showing Min./Max./Avg/MKT values
- System Requirements: Windows 7 or higher; Adobe Reader 9.0 or higher
- QA Certifications: Traceable certifications available as per user required calibration check points of individual unit
Quality Management System in accordance with ISO9001:2015 certified by TÜV SÜD



PDF Report:

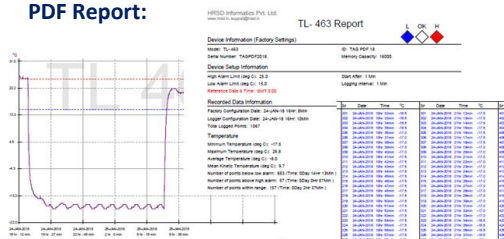

- ▶ Easy Plug N Play Interface with any PC
- ▶ No Proprietary Software is required
- ▶ Auto USB Comport Detection
- ▶ Auto generate Adobe PDF report
- ▶ Secured & Unalterable PDF report
- ▶ Graphical view
- ▶ Table of readings view
- ▶ Statistical view
- ▶ Maximum recorded value
- ▶ Minimum recorded value
- ▶ Average recorded value
- ▶ Mean kinetic temperature value
- ▶ Time spent over specified set limits
- ▶ Time spent below specified set limits

